



DEL PRO1238™

INTERLOCKING PVC PANEL

■ AGRICULTURAL - INDUSTRIAL - COMMERCIAL - RESIDENTIAL ■



ABOUT DELPRO 1238™

- ✓ Distinctive Tongue and Groove System for an quick and easy, both Vertical or Horizontal, installation.
- ✓ Hidden fastener, easy to install.
- ✓ 15 year warranty.
- ✓ Low maintenance, easy to clean.
- ✓ Economical, no painting required.
- ✓ Made with 100% exterior grade, Virgin PVC Formula. (*tried and tested for 2 decades*).
- ✓ Bright white, extremely smooth.
- ✓ 12" wide panels only. (*when wider panels are used, panel sagging can occur*).

ENJOY THE **STRENGTH**

The DelPro 1238® panels provide an efficient, economical and stylish finish for walls and ceilings. DelPro 1238® can be used in new and retrofit applications. The high quality Interlocking PVC Wall and Ceiling Panels are easy to install and virtually maintenance free.

DISCOVER THE *beauty*

The water resistant quality makes DelPro 1238® a durable cladding for walls and ceilings, particularly in damp areas. With a strong resistance to color change and fading, DelPro 1238® will neither delaminate, rot nor absorb water.

SPECIFICATIONS




With a wall thickness of 0.04" and overall panel thickness of 3/8" it is the most durable PVC panel on the market.

DELPRO 1238™ ACCESSORIES




"J Trim"



Inside Cove




Outside Cove

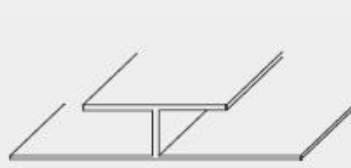

"H" Trim



Base Trim




"L" Trim

HIDDEN FASTENER

CLASS A FIRE RATING

15 YEARS WARRANTY

CFIA APPROVED

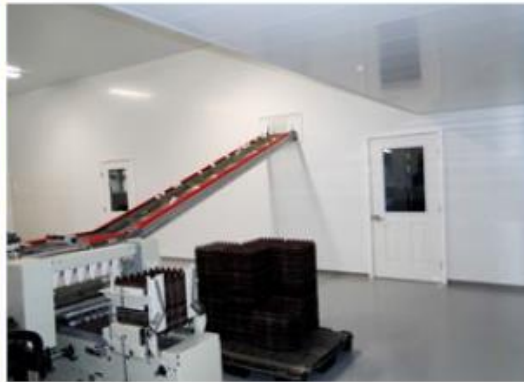

DelPro 1238™ has a redesigned click and lock system making it, the best in the industry.

WHY A WALL THICKNESS OF 3/8" IS BETTER THAN 1/2"

In the PVC Wall paneling industry, unlike lumber, thicker is not always better. The interior walls (connects the front and back wall of the panel) and the space between the front and back wall, are the weaker parts of the overall design. If you increase this space (the thicker your panel; the more you stretch the interior wall) you have now effectively decreased the overall impact strength of your panel. Therefore a 3/8" panel is much stronger and longer lasting than a 1/2" panel.

WHY IS DELPRO 1238 ONLY 12" WIDE?

If you have weight or tension on the panel (insulation or an angled fastener) it creates pressure between both ends and eventually the panel starts to bow or sag. In the PVC paneling industry it is proven that 12 inches is the best and maximum width to use (wall and ceiling). DelPro 1238 is easily able to withstand these pressures and will not bow or sag.

Contact Information:

Master Distributed in Canada by:



**liquid
diamond**

wall protection & plastic products

15715-116th Ave Edmonton, AB. T5M 3W1
ph: 780.489.1901 | fx: 780.489.1902
toll free: 1.877.489.1901 | www.liquiddiamondltd.com

